


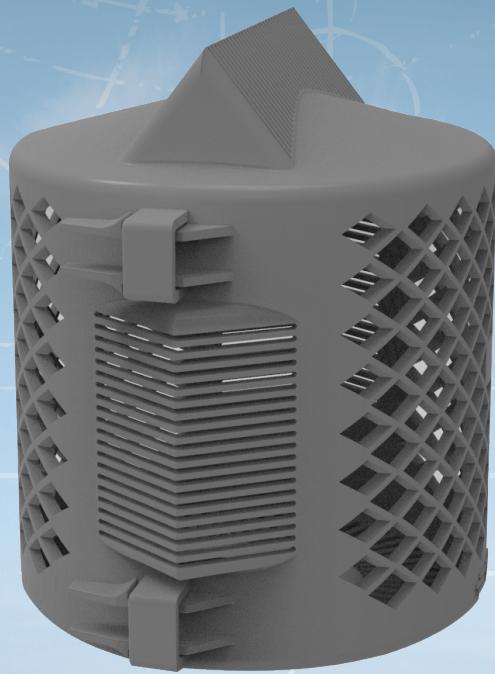

BUSHING CONNECTION ANIMAL COVER INSPECTION COVER (BCAC-IC2)

WILDLIFE AND ASSET PROTECTION PRODUCTS

KEY FEATURES

- Visual inspection of connection and oil levels
- Conductors and leads exit easily through cover
- Robust latching and hinging mechanisms
- Fast and versatile installation
- REACH and RoHS compliant

TE Connectivity's (TE) Raychem BCAC-IC2 insulating cover is designed to prevent animal caused outages on breaker, transformer and pole-top transformer bushings ranging from 15 kV to 36 kV.

The BCAC-IC2 insulating covers have been successfully eliminating outages from all types of animals for years. This cover is designed to provide the same great protection with enhanced features.

The cover is easily installed around bushings and connections by wrapping the double hinged design around the insulator's top skirt and snapping it in place with a robust latching mechanism. The cover allows for conductors to exit out both from the top and side interfaces without the need to trim the cover. The design allows for visible inspections of oil fill levels on transformer bushings as well.

Superior high-voltage outdoor materials are used in the BCAC-IC2 cover design. The rugged, cross linked, non-tracking, UV-resistant, high temperature polymer ensures long-term performance even in the most extreme environmental conditions

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.

BUSHING CONNECTION ANIMAL COVER INSPECTION COVER (BCAC-IC2)



TE's wildlife and asset protection products and systems of tubes, tapes, sheets, pre-formed covers and barriers provide a proven, cost-effective and easy-to-install solution to bird, animal and weather related outages.

PRODUCT PERFORMANCE

TESTING

AC Withstand

25 kV phase to ground

PHYSICAL


KEY MATERIAL PROPERTY	SPECIFICATION	RESULTS
Key Material Property	ATSM D638	17 MPa (2450 psi) min.
Tensile Strength	ASTM D638	25% min.

ELECTRICAL

KEY MATERIAL PROPERTY	SPECIFICATION	RESULTS
Dielectric Strength	ATSM D257	150 kV/cm min. (2.5 mm)
Tracking and Erosion Resistance	ATSM D2303 Step Voltage Method (initiate at 2.5 kV)	No tracking erosion to top surface or flame failure after: 1hr at 2.5 kV 1hr at 2.75 kV 1hr at 3.00 kV 1hr at 3.25 kV 1hr at 3.5 kV



BCAC-IC2 closed cage



BCAC-IC2 open cage

PRODUCT SELECTION INFORMATION - DIMENSIONS IN INCHES (MM)

DESCRIPTION	MOST COMMON APPLICATION	INSULATOR CORE RANGE INCHES (MM)	INSULATOR SHED RANGE- INCHES (MM)	COVER HEIGHT- INCHES (MM)	STANDARD PACK	COLOR
BCAC-IC2-13D/14(B3)	Station Class Arrester	5.5-9.25 (140-235)	10.0-13.0 (255-330)	14 (355)	3	Red
BCAC-G-IC2-13D/14(B3)	Station Class Arrester	5.5-9.25 (140-235)	10.0-13.0 (255-330)	14 (355)	3	Gray
BCAC-IC2-10.5D/12(B3)	Breaker Bushing	3-8.5 (76-216)	7.5-10.5 (190-267)	12 (305)	3	Red
BCAC-G-IC2-10.5D/12(B3)	Breaker Bushing	3-8.5 (76-216)	7.5-10.5 (190-267)	12 (305)	3	Gray
BCAC-IC2-8.5D/14(B3)	Breaker Bushing	2.5-6.5 (64-216)	5.5-8.5 (140-216)	14 (355)	3	Red
BCAC-G-IC2-8.5D/14(B3)	Breaker Bushing	2.5-6.5 (64-216)	5.5-8.5 (140-216)	14 (355)	3	Gray
BCAC-IC2-5D/14/1.5(B6)	Termination	1.5-3.7 (38-95)	3.0-5.0 (76-127)	14 (355)	6	Red
BCAC-G-IC2-5D/14/1.5(B6)	Termination	1.5-3.7 (38-95)	3.0-5.0 (76-127)	43 (355)	6	Gray
BCAC-IC2-5D/14/2(B6)	Termination	1.5-3.7 (38-95)	3.0-5.0 (76-127)	14 (355)	6	Red
BCAC-G-IC2-5D/14/2(B6)	Termination	1.5-3.7 (38-95)	3.0-5.0 (76-127)	14 (355)	6	Gray

TECHNICAL REPORT

EDR-5514	BCAC-IC Electrical Evaluation
UVR 8209	Material Test Report

INSTALLATION INSTRUCTIONS

EPP-322-10/18	Installation Instructions
PII-56104	for BCAC-IC2 (all sizes)

Learn more: [TE.com/energy](https://www.te-connectivity.com/energy)

© 2022 TE Connectivity. All Rights Reserved. EPP-XXXX-DDS-8/22

TE, TE Connectivity, TE connectivity (logo), EVERY CONNECTION COUNTS, Raychem are trademarks owned or licensed by TE Connectivity. Other logos, product and company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions, specifications, and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications, and/or information. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Connect with us:

[TE.com/energy-contact](https://www.te-connectivity.com/energy-contact)